

DCM-271BAH-OS

Attractive, stainless steel modern design delivers a great ice experience with easy-to-chew cubelets and touchless operation.



Freestanding Model
Use SD-271 stand. (not included)

Unrivaled performance

Always have ice when you need it. The DCM-271BAH-OS produces over 257 pounds in 24 hours with a built-in storage capacity of 10 pounds for convenient ready access. Ideal to satisfy the hydration needs of the busiest facility, with glass after glass of ice and water.

Superior Technology

-  Opti-Serve touchless ice and water for hygienic peace of mind
-  Advanced CleanCycle24™ technology flushes reservoir and evaporator every 24 hours for cleaner ice and added hygiene
-  Protected by H-Guard Plus Antimicrobial Agent for the prevention of bacteria growth
-  Popular Cubelet ice: soft, chewable, compressed nuggets of ice cool the beverage quickly and absorb flavors making them an easy-to-chew treat
-  Generous clearance of 10-1/4" to accommodate large cups, sport bottles, and pitchers
-  Now with quieter operation!

Features

- Opti-Serve touchless ice and water
- Attractive, modern design
- Corrosion resistant, stainless steel exteriors
- Popular soft Cubelet ice
- Up to 257 lbs. of ice production in 24 hours
- Durable, stainless steel drain pan grate
- Easy-cleaning, removable spout
- 2-second flush cycle every hour
- Advanced CleanCycle24™ design
- Protected by H-Guard Plus Antimicrobial Agent
- 6 ft. cord with a NEMA 5-15 plug

Water options

ambient



ice



Number of users



Serves 1 - 100+ users



Meets the Accessibility Guidelines for the Americans with Disabilities Act (ADA).

Tested and certified



3 year Parts & Labor on entire machine. 5 year Parts on Compressor; air-cooled condenser coil. Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Waterlogic International Limited and WLI Trading Limited reserve the right, in order to reflect continuous research and development, to amend or change specifications without prior notice. Waterlogic and the Waterlogic logo.

Technical specifications

Types Available

Countertop
Floor Standing (SD271 stand available)
Stand not included.

Dimensions

Freestanding:
16-5/8" (W) x 24-1/4" (D) x 31-3/4" (H) Includes 4 legs.
Stand dimensions:
16.56" (W) x 35.18" (H)* x 24.12" (D) Includes 4 legs.

Dispensing Area Height

10-1/4"

Filtration

Carbon and sediment

Storage Capacity

.3 ft³/10 lbs.


Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

Electrical

Amperage: 8.5A
Voltage: 115V/60/1

Operating limits

Ambient Temp range: 45-100°F
Water Temp range: 45-90°F
Water pressure: 10-113 PSIG
Voltage Range: 104-127V
Heat Rejection: 3300 BTU/hr

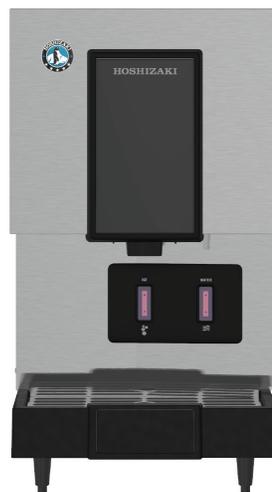

Allow 6" (15cm) clearance at rear and sides for proper air circulation and ease of maintenance and/or service should they be required.

Allow 24" (61 cm) clearance at top to allow for stainless steel auger removal.

Call us today

Waterlogic

Tel: 855-350-5518

waterlogica.com

info@waterlogica.com

3175 Bass Pro Drive
Grapevine, TX 76051

For more information, visit www.waterlogica.com